

FORM PTO-1390 (Modified)
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES

1-22918

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/744375

INTERNATIONAL APPLICATION NO.

PCT/GB99/01565

INTERNATIONAL FILING DATE

17 May 1999 (17.05.99)

PRIORITY DATE CLAIMED

24 July 1998 (24.07.98)

TITLE OF INVENTION

FURNACE LINING

APPLICANT(S) FOR DO/EO/US

DIXON, Thomas Gildroy Shaw

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau)
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3))
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

Post card

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) 09/744375	INTERNATIONAL APPLICATION NO. PCT/GB99/01565	ATTORNEY'S DOCKET NUMBER 1-22918
--	--	--

21. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1,000.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ... \$860.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =	CALCULATIONS PTO USE ONLY																									
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30	\$0.00																									
<table border="1" style="width:100%"><tr><td style="width:15%">CLAIMS</td><td style="width:25%">NUMBER FILED</td><td style="width:25%">NUMBER EXTRA</td><td style="width:15%">RATE</td><td style="width:20%;"></td></tr><tr><td>Total claims</td><td>34 - 20 =</td><td>14</td><td>x \$18.00</td><td>\$252.00</td></tr><tr><td>Independent claims</td><td>8 - 3 =</td><td>5</td><td>x \$80.00</td><td>\$400.00</td></tr><tr><td colspan="4">Multiple Dependent Claims (check if applicable). <input type="checkbox"/></td><td>\$0.00</td></tr><tr><td colspan="4" style="text-align: right;">TOTAL OF ABOVE CALCULATIONS =</td><td>\$1,512.00</td></tr></table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		Total claims	34 - 20 =	14	x \$18.00	\$252.00	Independent claims	8 - 3 =	5	x \$80.00	\$400.00	Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	TOTAL OF ABOVE CALCULATIONS =				\$1,512.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE																							
Total claims	34 - 20 =	14	x \$18.00	\$252.00																						
Independent claims	8 - 3 =	5	x \$80.00	\$400.00																						
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00																						
TOTAL OF ABOVE CALCULATIONS =				\$1,512.00																						
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input checked="" type="checkbox"/>	\$756.00																									
SUBTOTAL =	\$756.00																									
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30 +	\$0.00																									
TOTAL NATIONAL FEE =	\$756.00																									
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>	\$0.00																									
TOTAL FEES ENCLOSED =	\$756.00																									
	Amount to be: refunded \$ charged \$																									

<input type="checkbox"/> A check in the amount of _____ to cover the above fees is enclosed.	
<input checked="" type="checkbox"/> Please charge my Deposit Account No. 13-0005 in the amount of \$756.00 to cover the above fees A duplicate copy of this sheet is enclosed.	
<input type="checkbox"/> The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. _____ A duplicate copy of this sheet is enclosed.	

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Oliver E. Todd, Jr. MacMILLAN, SOBANSKI & TODD, LLC One Maritime Plaza, Fourth Floor 720 Water Street Toledo, Ohio 43604	_____ SIGNATURE Oliver E. Todd, Jr. NAME 24,746 REGISTRATION NUMBER 23 January 2001 DATE
--	---

09/744375

PATENT

JCU7 Rec'd PCT/PTC 23 JAN 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:)
Thomas Gildroy Shaw Dixon)
Serial No. --)
Filed: Herewith)
Based On PCT/GB99/01565)
Filed 5/17/99)
For: Furnace Lining) Attorney Docket 1-22918

Assistant Commissioner of Patents
Washington, D. C. 20231

PRELIMINARY AMENDMENT AND
INFORMATION DISCLOSURE STATEMENT

Honorable Sir:

Prior to calculating the filing fee in the application filed herewith, please amend the claims as follows:

Claim 1 - rewrite as follows:

1. Amended) A lining for a furnace the lining having insulating material attached to an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, [characterised] characterized in that a protective element is provided at least partially to cover the hot and/or the cold face, the protective element being secured relative to the face by a securing means which co-operates with a member which is embedded in the insulating material.

Claim 5 - rewrite as follows:

5. (Amended) A lining according to [any one of claims 2 to 4] claim 2 wherein the protective element is provided at the hot face, and the headed fastener is made at least substantially of a ceramic material.

Claim 6 - rewrite as follows:

6. (Amended) A lining according to [any one of claims 1 to 3] claim 1 wherein the embedded member includes an integral shank or is adapted to have a shank secured thereto, and the securing means is engageable with the shank to secure the protective element to the hot face.

Claim 8 - rewrite as follows:

8. (Amended) A lining according to [any one of the preceding claims] claim 1 wherein the protective element is of plate-like configuration.

Claim 9 - rewrite as follows:

9. (Amended) A lining according to [any one of the preceding claims] claim 1 wherein the protective element is made at least substantially of one or more of a ceramic material, a blanket of silica free insulation, a high-temperature resistant textile material, and a higher temperature resistant high alumina insulation [that] than other insulation material of the lining.

Claim 10 - rewrite as follows:

10. (Amended) A lining according to [any one of the preceding claims] claim 1 wherein the furnace lining includes a plurality of individual blocks or modules of insulating material, each attached at the inside wall of the furnace, each module including a ceramic blanket which is folded to a block-like shape with the folds extending transversely to the furnace wall.

Claim 15 - rewrite as follows:

15. (Amended) A lining according to claim 13 [or claim 14] wherein the embedded member is of a single plate or multiple plate-like construction and is made of a material which is sufficiently strong to resist pull-out forces.

Claim 16 - rewrite as follows:

16. (Amended) A lining according to [any one of the preceding claims] claim 1 wherein the protective element includes a plurality of layers which [may or may not be] are bonded together.

Claim 17 - rewrite as follows:

17. (Amended) A lining according to [any one of the preceding claims] claim 1 wherein the protective element is secured relative to the hot or cold face of the lining by adhesive cement in addition to the securing means.

Claim 18 - rewrite as follows:

18. (Amended) A lining for a furnace the lining including insulating material attached at an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, [characterised in that] the lining including a protective element [is provided] which at least partially [to cover] covers the hot face and/or the cold face, the protective element being secured relative to the face by means including a headed fastener[,] having a shank [of] which co-operates with a member which is embedded in the insulating material.

Claim 19 - rewrite as follows:

19. (Amended) A lining for a furnace having insulating material attached at an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, [characterised in that] and wherein a protective element is provided at least partially to cover the hot and/or the cold face, the protective element being secured relative to the face by means including a member which is embedded in the insulating material and a securing means

which is attached to a shank which is integral with the embedded member or is attached to the embedded member, the shank [or] of the securing means passing through the protective element into engagement with the embedded member or the securing means.

Claim 20 - cancel.

Claim 21 - rewrite as follows:

21. (Amended) A method of lining a furnace wall including the steps of attaching insulating material at or adjacent a wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, [characterised in that] and wherein the method includes embedding in the insulating material[,] a member which is adapted to co-operate with a securing means, providing a protective element at least partially to cover the hot and/or cold face, securing the protective element to the face by attaching the securing means to the embedded member.

Claim 24 - rewrite as follows:

24. (Amended) A method according to [any one of claims 21 to 23] claim 21 which includes inserting the shank of the fastener through an opening preformed in the insulating material, and into co-operation with the embedded member.

Claim 25 - rewrite as follows:

25. (Amended) A method according to claim 21 which includes [includes] attaching a shank to the embedded member, and engaging the securing means and the shank to secure the protective element to the hot and/or the cold face.

Claim 27 - rewrite as follows:

27. (Amended) A method according to [any one of claims 21 to 26] claim 21 wherein the furnace is modular having a plurality of modules or blocks of insulating material, and the method includes covering [being characterised in that] a substantial part of the furnace wall [is covered] by a plurality of protective elements each secured at the

hot and/or the cold face of the insulating material to at least one individual module, by means including a securing means which co-operates with a member which is embedded in the insulating material.

Claim 28 - rewrite as follows:

28. (Amended) A method according to claim 27 [where dependent on claim 26] wherein the embedded member is embedded in the insulating material by forcing the member into the insulating material and then rotating the member, and wherein the method includes inserting the member to be embedded when in an orientation generally aligned with [the] folds in the insulating material and then rotating the member so that the member extends transversely to the folds.

Claim 29 - rewrite as follows:

29. (Amended) A method according to claim 26 [or claim 28] wherein the member to be embedded includes a shank and the member is rotated by using the shank as a tool.

Claim 30 - rewrite as follows:

30. (Amended) A method according to claim 26 [or claim 28] wherein the member is rotated using a tool which co-operates with the member and is subsequently removed from the insulating material.

Claim 31 - rewrite as follows:

31. (Amended) A method of lining a furnace wall including the steps of attaching insulating material at or adjacent the wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the face wall, [characterised in that] and wherein the method includes embedding in the insulating material[,] a member which is adapted to co-operate with a shank of a headed fastener, providing a protective element at least partially to cover the hot or the cold face, securing the protective element to the face by inserting the shank of

the headed fastener through the protective element into the insulating material[,] so that the shank may co-operate with the embedded member.

Claim 32 - rewrite as follows:

32. (Amended) A method of lining a furnace wall including the steps of attaching insulating material at or adjacent the wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, [characterised in that] and wherein the method includes embedding in the insulating material[,] a member which is adapted to co-operate with a securing means, providing a protective element at least partially to cover the hot or cold face, securing the protective element to the face by attaching the securing means to the embedded member such that the protective element is retained between the securing means or a part thereof[,] and the face.

Claim 33 - rewrite as follows:

33. (Amended) A method of repairing a lining of a furnace made by [the] a method [of any one of claims 26 to 32] including the steps of attaching insulating material at or adjacent a wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, and wherein the method includes embedding in the insulating material, a member which is adapted to co-operate with a securing means, providing a protective element at least partially to cover the hot and/or cold face, securing the protective element to the face by attaching the securing means to the embedded member and wherein the embedded member is embedded in the insulating material by forcing the member into the insulating material and then rotating the member, which repair method includes the steps of removing the securing means, removing the protective element or a layer of the protective element, and securing a replacement protective element or protective element

layer, to the face of the insulating material by a securing means which co-operates with a member which is embedded in the insulating material.

Claim 34 - cancel.

Claim 36 - cancel.

Claim 37 - cancel.

Please add the following claim:

38. A lining according to claim 1 wherein the protective element includes a plurality of layers not bonded together.

REMARKS

As amended, claims 1-19, 21-33, 35 and 38 are present in the application. Claims 5, 6, 8-10, 15-17, 24, 27-30 and 33 have been amended to eliminate multiple dependency. Claims 1, 9, 16, 18-21, 25, 27, 31-33 have been amended to more clearly point out the claimed invention. Claims 20, 34, 36 and 37 have been cancelled. Claim 38 is new.

For the convenience of the United States Patent and Trademark Office and pursuant to 37 CFR 1.97 and 1.98, record is hereby made of information which the Patent Office may wish to consider in connection with its examination of the above-identified patent application. Enclosed is a list of all patents, publications and other information submitted for consideration along with a legible copy of each document. This Information Disclosure Statement should not be considered as a representation that a search has been made, as a representation that no other potentially material references may exist, or as an admission that the information cited in this statement is, or is considered to be, material to patentability as defined in 37 C.F.R. §1.56(b).

09/744375

JCO7 Rec'd PCT/PTO 23 JAN 2001

The enclosed prior art documents were cited in the International Search Report in the parent PCT patent application.

Respectfully submitted,

By Oliver E. Todd, Jr.
Oliver E. Todd, Jr.
Reg. No. 24,746

Enclosures

MacMillan, Sobanski & Todd, LLC
One Maritime Plaza
Fourth Floor
720 Water Street
Toledo, Ohio 43604

(419) 255-5900
Fax (419) 255-9639

25 FEB 2001

99/777

Title: Furnace Lining

Description of Invention

This invention relates to a furnace lining.

By "furnace" we mean a furnace, kiln, oven or the like where there is a chamber which is heated, and into which articles are placed for heat treatment.

Furnaces tend to be dusty, particularly where there is provided a fan or high velocity burner or the like for circulating hot air within the furnace, and dust is undesirable, particularly in the case of a kiln in which ceramic articles/glazes are fired, or in an oven where vitreous enamel is baked dry. The problem of dust is aggravated where there is provided an insulating lining which is of a fibrous nature which may contain silica, which may also present a potential health hazard if the fibres become airborne.

To reduce the amount of dust contributed by the furnace lining it is common to cover the lining with a protective covering such as high-temperature resistant textile material which is attached to the lining e.g. by pins. Another approach is to cement anchors into the fibres of the insulating lining.

Yet another approach is to attach to the hot face of the lining, i.e. the face of the lining facing inwards of the furnace, ceramic plate-like members. This is used where the underlying lining requires protection from deleterious atmospheres, e.g. aggressive gases such as vanadium pentoxide which can eat away the fibrous lining material.

This latter approach provides the advantage that the ceramic plates, being generally rigid, may be used as supports for, for example, heating elements. Such ceramic plates are typically attached to the hot face with a cement material, but the adhesive effect of such cements tends to deteriorate in use with the effect that the ceramic plates separate from the insulating lining. It will be appreciated that a falling ceramic plate can cause substantial damage to

109030 64450

articles in the kiln, particularly where the ceramic plate is attached to the lining of a roof of the kiln, and results in damage occurring to the lining.

More expensive furnace lining materials are known such as that sold under the name "Saffil". These do not contain silica but are about 90% alumina based fibrous insulation. Another alternative is a glass based fibre such as "Superwool".

As these do not contain silica, they are not subject to health and safety legislation controlling the use of silica based materials. Saffil is a more expensive furnace lining material than silica based materials and Superwool, and thus tends only to be used in environments where higher temperatures are experienced. Hence for economy's sake, the furnace lining has to be designed with the temperature to which the furnace is to be heated in mind, and once designed there is, conventionally, little scope for improving the thermal resistance of the lining.

In some circumstances it is desirable to have a protective element at the cold face between the furnace wall and the furnace lining.

According to a first aspect of the invention we provide a lining for a furnace the lining having insulating material attached to an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, characterised in that a protective element is provided at least partially to cover the hot and/or the cold face, the protective element being secured relative to the face by a securing means which co-operates with a member which is embedded in the insulating material.

Thus particularly but not exclusively where the protective element is secured relative to the hot face of the insulating material the invention may provide the advantage of a conventional furnace lining which comprises a protective ceramic plate or plates attached to the hot face of the insulating

material, but the manner by which the ceramic plate is attached is more secure than a simple cement attachment.

It is envisaged that a ceramic plate type protective element may be attached by both adhesive cement and the securing means/embedded member so that in the event that the cement fails, the co-operation between the securing means/embedded member will prevent the protective element becoming detached from the face of the insulating material, and vice versa.

Alternatively, the advantages of non-silica containing insulating materials may be provided by attaching one or more layers of non-silica containing material, e.g. in the form of a blanket, to a conventional silica-containing insulating material lining. Thus an existing lining may be adapted for use in higher temperature applications by applying a layer of Saffil or the like particularly to the hot face of the insulating material, as the higher grade, non-silica containing material is tolerant to higher surface temperatures.

Where the lining does not require upgrading but it is desired to provide a protective element to isolate the silica containing materials, a layer of Superwool or the like may be attached.

Where it is desired to do so, a layer or layers of conventional silica-containing lining materials may be added to the hot face of the insulating material of an existing lining structure, to upgrade the lining, although some means to protect the silica-containing lining materials from becoming airborne may be necessary to comply with health and safety legislation.

In one embodiment the securing means comprises a headed fastener a shank of which co-operates with the embedded member. For example, most conveniently the shank of the headed fastener has provided thereon, a screw thread, e.g. a male screw thread, and the embedded member includes a corresponding opposite screw thread, e.g. female threaded opening, with which the shank is in use engaged. Thus the fastener may be unscrewed for maintenance of the lining as and when required. However it is envisaged that

the shank of the headed fastener may otherwise co-operate with the embedded member to attach the protective element at the respective face.

The shank of the threaded fastener may pass through a passage of the protective element into co-operation with the embedded member. For example, the passage may comprise a pre-formed opening through the protective element or a cut-out at a side of the protective element as desired.

Of course, in the construction of the first embodiment of the invention where the protective element is provided at the hot face, the headed fastener will be subjected to the heat within the furnace and so preferably the fastener is made at least substantially, and preferably totally, of a ceramic material. In low temperature environments though or at the cold face, the fastener could be made of, for example, nickel chrome or another suitable metal.

In another embodiment, the embedded member comprises an integral shank or is adapted to have a shank secured thereto, and the securing means is engageable with the shank to secure the protective element to the respective face.

Either the securing means or the shank may pass through the protective element for securing to the shank or the securing means respectively.

In each case, whether the protective element is secured to the hot or the cold face, because the securing means co-operates with the embedded member, there is no path for the conduction of heat from the hot to the cold face and hence to the inside furnace wall, via the securing means.

The protective element is preferably as light as possible and may conveniently be of plate-like configuration, made at least substantially and preferably totally, of a ceramic material. However, the protective element could comprise a blanket of silica free insulation such as Superwool or a high-temperature resistant textile material, and/or a higher temperature resistant high alumina insulation than other insulating material of the lining.

However, the protective element could comprise additional layers of the same insulating material as that from which the remainder of the lining is made.

Whether the protective element is provided at the hot and/or cold face a furnace lining typically includes a plurality of individual blocks or modules of insulating material, each attached at the inside wall of the furnace. For example, each module may comprises a ceramic blanket which is folded to a block-like shape, with the folds extending transversely to the furnace wall.

The member with which the fastener co-operates may be embedded in at least one of the individual blocks during manufacture of the block and may be arranged to as to extend generally transversely to the folds.

The embedded member may have an integral shank or may be adapted to have a shank secured thereto. In either case, instead of being embedded in the block during manufacture of the block, the embedded member may be embedded in the lining by being forced into the lining material and then being rotated.

For example the embedded member may be generally elongate or may have a generally elongate part or parts. Each block may comprise a ceramic blanket which is folded to a block-like shape, with the folds extending transversely to the furnace wall. The embedded member may be forced into the insulating material with an elongate axis thereof or of the elongate part in an orientation generally aligned with the folds and is then rotated generally about an axis which is transverse to the elongate axis so that the elongate axis extends generally transverse to the folds.

The embedded member may be thin e.g. of a single plate or multiple plate-like construction, and may be made substantially or totally of a ceramic material or another suitable material which is sufficiently strong to resist pull-out forces.

Whereas the protective element may comprise a single layer construction, the protective element may comprise a plurality of layers which may or may not be bonded together.

The protective element, or where the protective layer comprises single layers of e.g. ceramic, the protective element may additionally be secured relative to the hot or cold face by adhesive cement.

According to a second aspect of the invention we provide a lining for a furnace the lining including insulating material attached at an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, characterised in that a protective element is provided at least partially to cover the hot and/or the cold face, the protective element being secured relative to the face by means including a headed fastener, a shank of which co-operates with a member which is embedded in the insulating material.

According to a third aspect of the invention we provide a lining for a furnace having insulating material attached at an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, characterised in that a protective element is provided at least partially to cover the hot and/or the cold face, the protective element being secured relative to the face by means including a member which is embedded in the insulating material and a securing means which is attached to a shank which is integral with the embedded member or is attached to the embedded member, the shank or the securing means passing through the protective element into engagement with the embedded member or the securing means.

According to a fourth aspect of the invention we provide a method of lining a furnace wall comprising the steps of attaching insulating material to the wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall,

characterised in that the method comprises embedding in the insulating material, a member which is adapted to co-operate with a securing means, providing a protective element at least partially to cover the hot and/or cold face, securing the protective element to the face by attaching the securing means to the embedded member.

Where the securing means comprises a headed fastener, the method may include inserting a shank of the headed fastener through the protective element into the insulating material so that the shank may co-operate with the embedded member.

The shank of the headed fastener may co-operate with the embedded member by rotating the shank relative to the embedded member so that a screw thread of the shank engages with a corresponding screw thread of the embedded member although other methods of co-operation may alternatively be employed.

In a typical furnace lining construction the insulating material is attached to the furnace wall by a fixing means which is operated on from the hot face of the material, using a tool which is passed through the insulating material in an opening from the hot face of the material. For example a self-drilling fastener of the fixing means may be driven into the furnace wall by being rotated using a tool which is inserted through the fibrous insulating material, thus creating an opening therethrough, and the tool is operated from the hot face of the insulating material. Alternatively, a fastener of a fixing means or the fixing means itself may be welded to the inside furnace wall, using a welding tool which is inserted through the fibres of the lining, thus creating an opening therethrough.

The method of the invention may include inserting the shank of the fastener through the opening into co-operation with the embedded member so that there is no need to provide an additional opening to receive the shank of the headed fastener.

Instead of the securing means comprising a headed fastener a shank of which co-operates with the embedded member, the embedded member may comprise an integral shank, or the method may include attaching a shank to the embedded member, and the method may include engaging the securing means and the shank to secure the protective element to the hot and/or the cold face.

The method may further include positioning the protective element at the hot or cold face of the insulating material and either passing the shank which is integral or attached to the embedded member through the protective element or passing the securing means through the protective element and engaging the securing means and the shank so that the protective element is retained between the securing means or a part thereof and the face

The embedded member may be embedded in the insulating material during manufacture of the block or may be embedded in the insulating material by forcing the member into the insulating material and then rotating the member so that the member may cut or divide the insulating material and be anchored therein.

The furnace lining may be modular comprising a plurality of modules or blocks of insulating material, and the method may be characterised in that a substantial part of the furnace wall is covered by a plurality of protective elements each secured at the hot face of the insulating material at least one an individual module, by means including a securing means which co-operates with a member which is embedded in the insulating material.

Where the insulating material is formed with folds which extend transversely to the furnace wall, the method may include inserting the member to be embedded when in an orientation generally aligned with the folds so as to cause minimum disruption to the insulating material as the member is forced in, and then rotating the member so that the member extends transversely to the folds.

In one arrangement, the member to be embedded includes a shank and the member is rotated by using the shank as a tool, although alternatively the member may be rotated using a tool which co-operates with the member and is subsequently removed from the insulating material.

According to a fifth aspect of the invention we provide a method of lining a furnace wall comprising the steps of attaching insulating material to the wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the face wall, characterised in that the method comprises embedding in the insulating material, a member which is adapted to co-operate with a shank of a headed fastener, providing a protective element at least partially to cover the hot or the cold face, securing the protective element to the face by inserting the shank of the headed fastener through the protective element into the insulating material, so that the shank may co-operate with the embedded member.

According to a sixth aspect of the invention we provide a method of lining a furnace wall comprising the steps of attaching insulating material to the wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, characterised in that the method comprises embedding in the insulating material, a member which is adapted to co-operate with a securing means, providing a protective element at least partially to cover the hot or cold face, securing the protective element to the face by attaching the securing means to the embedded member such that the protective element is retained between the securing means or a part thereof, and the face.

At the hot face, at least where the protective element or elements are not cemented to the lining, it will be appreciated that by virtue of the protective element(s) being secured relative to the hot face by co-operation between the embedded member and the securing means, the protective elements may be removed subsequently to facilitate maintenance of the lining, such as the

addition of layers required to repair mechanical and/or temperature damage to the lining.

Thus according to an seventh aspect of the invention we provide a method of repairing a lining of a furnace made by the method of the fourth, fifth or sixth aspects of the invention including the steps of removing the securing means, removing the protective element or a layer of the protective element, and securing a replacement protective element or protective element layer, to the face of the insulating material by a securing means which co-operates with a member which is embedded in the insulating material.

Where a furnace is lined with a lower grade insulating material and it is desired to improve either the thermal resistance of the lining or its tolerance of high temperature, this may readily be achieved either by replacing the protective element in use with a higher grade protective element where the invention is already employed, or adding one or more layers to the protective element, or to the lining below the protective element.

According to an eight aspect of the invention we provide a method of improving the thermal resistance of an existing furnace lining having insulating material attached to an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent a furnace wall and the insulating material having embedded thereon a member which is adapted to co-operate with a securing means the method being characterised in that a protective element is provided at least partially to cover the hot or cold face, the protective element being secured relative to the hot or cold face by the securing means co-operating with the member which is embedded in the insulating material.

Thus provided that an embedded member is provided in the insulating material of the lining, an existing lining may be upgraded with minimal disturbance of the lining.

The invention will now be described with reference to the accompanying drawings in which:

FIGURE 1 is an illustrative perspective view from above and to the side of part of a furnace wall lining in accordance with the invention partly broken away to reveal hidden features, and showing two alternative ways of attaching insulating material to a furnace wall;

FIGURE 2 is an illustrative view similar to figure 1 but showing an alternative embodiment, and omitting the furnace wall and showing the insulating material in a simplified manner;

FIGURE 3 is an enlarged side view showing a headed fastener of the embodiment of figure 1 in co-operation with an embedded member;

FIGURE 4 is a front view of the embedded member of figure 3;

FIGURE 5 is an illustrative view of the embodiment of figure 1 at a stage during construction, showing the insulating material simply.

FIGURE 6 is a front view of an alternative embedded member;

FIGURE 6a is an illustrative view showing how a tool is used to insert an embedded member into insulating material;

FIGURE 7 is a side view of an alternative embedded member with a shank attached;

FIGURE 7a is an illustrative view of the member of figure 7 in use.

FIGURE 8 is a side view of an alternative member adapted to be embedded.

FIGURE 8a is a plan view of the member of figure 8.

Referring to figure 1 of the drawings, part of a furnace lining construction 10 is shown. Part of a furnace wall is indicated at 11, and may comprise part of the roof or a side wall of the furnace.

The furnace wall 11 may comprise a simple steel panel wall, or may be provided by a metal or other mesh. To protect the furnace wall 11 in use, from the high temperatures within the furnace, the furnace is lined with insulating

12

material which typically comprises a plurality of individual blocks or modules of insulating material, one of which is indicated at 12.

The thickness of the module 12 will depend on the temperatures to be generated in the furnace, and the degree of thermal resistance required to protect the furnace wall 11.

The modules 12 are typically made from a fibrous blanket of insulating material, such as an alumina/silicate based fibre, which is folded as indicated in figure 1 and compressed to shape and held by rods 18 which extend transversely to the folds, generally parallel to the furnace wall 11. The folds may be trimmed at the face remote from the furnace wall 11, to provide a substantially flat face 20 where a protective layer 26, is to be cemented to the fibres of the module 12. A fixing 14 may be embedded in the module 12 as the module 12 is made or subsequently. The folds are preferably arranged to extend transversely to the furnace wall 11.

The modules 12 are attached relative to the furnace wall 11 by fixings the nature of which will depend on the module construction and the nature of the furnace wall 11.

At the right hand side of figure 1 a fixing particularly suitable for a construction where the furnace wall 11 is a steel panel is shown. The fixing 14 is attached by one or more fasteners 15 to the furnace wall 11, the fixing 14 having a hooked part 17 which is embedded in the fibres of the module 12 in a position where the fixing rod (or tube) 18 is inserted through the folds to co-operate with the hooked part 17. The rod 18 may co-operate with a plurality of fixings 14 attaching modules 12 to the inside of the furnace wall 11 but preferably and usually, each module 12 will have its own rod 18 or rods (or tubes).

At the left hand side of the figure a fixing 14a is shown which is more suited to a furnace wall 11 construction which comprises a mesh. The fixing 14a is inserted through the mesh wall 11 to a position where a hooked part 17a

is engageable by a rod 18 (or tube). The fixing 14a has a transversely extending part 19 which prevents the fixing 14a passing entirely through the mesh wall 11.

Any other fixing for attaching the modules 12 to the furnace wall 11 may be employed. However, referring to figure 5, one particularly suitable fixing method, for use in conjunction with the present invention is illustrated. A fixing 14b similar to the fixing 14 of figure 1 is embedded in the module 12 during manufacture of the module 12 or subsequently, and is attached to the furnace wall 11 (in this case a steel panel) by one or more fasteners 15b which are operated upon from the distant inside, so called hot, face 20 of the module 12. This is achieved by passing a suitable fixing tool 21 through the material of the module 12 in the direction indicated by arrow A. Inserting the tool 21 through the material of the module 12 creates an opening 22 through the module 12 for a use hereinafter to be explained as indicated in dotted lines in figure 1. It will be noted in figure 5 that the tool 21 has to pass through a member 25 which is embedded in the module 12.

The tool 21 may be hollow so as to "core" the module 12, but due to the fibrous nature of the insulating material, when tool 21 is removed, the opening 22 will substantially closed.

Alternatively, the fixing 14b could be attached to the inside of the furnace wall by welding using a suitable tool inserted through the fibres of the module 12, or by any other desired means.

Referring again to figure 1, to provide a covering for the hot face 20 of the module 12, to deter dust circulation within the furnace and to provide physical protection for the fibrous material of the module 12, a protective element 26 is secured at the hot face 20 of the insulating lining material. In this example, the protective element 26 comprises a cordierite bat, which is a ceramic based material. Conventionally, such protective elements 26 are simply cemented in position during manufacture of the modules 12, although may be

cemented in position once the modules 12 have been attached to the furnace wall 11.

In accordance with the invention, alternatively or additionally, the protective element 26 is secured at the hot face 20 of the modules 12 by a securing means comprising in this embodiment a headed fastener 27, a shank 28 of which is adapted to co-operate with the member 25 which is embedded in the material of the module 12. The fastener 27 has a head 29 which is larger than a pre-formed passage 30 through the protective element 26, whilst the shank 28 passes through the passage 30 into co-operation with the member 25. The member 25 has an opening 31 to receive the shank 28, which opening 31 is larger than the external dimension of the fixing tool 21 by which the fixing 14b is attached to the furnace wall, as described above with reference to figure 5.

Referring also now to figures 3 and 4, it can be seen that the shank 28 of the fastener 27 has a coarse male thread 35, whilst the opening 31 through the embedded member 25 has a corresponding female thread 36 so that the fastener 27 co-operates with the embedded member 25 by turning the fastener 27 with a suitable tool to engage with e.g. the head 29 of the fastener 27, and thus screwing the shank 28 of the fastener 27 into the embedded member 25.

Because the fastener 27 is in use subjected to the temperatures within the furnace, the fastener 27 is made of a suitable heat resistant material such as a ceramic based material although in a lower temperature application the fastener 27 could be made of nickel chrome or another suitable metal. The embedded member 25, although protected to some degree from the heat generated in the furnace, may also be made of ceramic or similar material, but may be made of metal or another material as desired in a lower temperature application. It will be appreciated that the embedded member 25 may be positioned at an optimum distance from the hot face 20 irrespective of the thickness of the modules 12.

The screw thread 35 of the shank 28, and the corresponding thread 36 of the embedded member 25 are preferably coarse so that only one, two or three thread pitches engage, to reduce the risk of the threads binding, whilst providing adequate resistance to the fastener 27 unscrewing as a result of vibrations experienced in use.

The embedded member 25 preferably has points 38,39 to facilitate its insertion through the folds of the material of the module 12 during construction of the module 12, but otherwise is preferably plate-like and of sufficient strength to provide a substantial resistance to pull out forces. Many alternative configurations to that shown in figure 4 are possible.

Referring back to figure 1 it will be appreciated that the thickness of the module 12 from the furnace wall 11 to the hot face 20 may vary to suit particularly furnace constructions. Because the fastener 27 engages with the embedded member 25, the position of which can be the same relative to the hot face 20 whatever the module 12 thickness, it is possible for a single length fastener 27 to be used in a wide variety of applications so that it is unnecessary to produce a range of fasteners of different length.

Various modifications are possible without departing from the scope of the invention.

For example as shown in figure 2, where similar parts to those shown in figure 1 are indicated by the same reference number, the protective element 26 does not comprise a single layer of material, but comprises a plurality of layers 26a, 26b of e.g. a silica free fibrous material, which may cover a single module 12, or a plurality of modules 12 as desired. In figure 2 the inner and outer layers 26a, 26b are attached to the insulating material of the module 12 by the fastener 27 and embedded member 25, making the replacement of the outer or both of the protective element layers 26a, 26b readily possible e.g. to replace a deteriorating outer layer 26b with a new layer 26b and/or to upgrade the thermal resistance of the lining by providing a higher grade layer 26b than

before. Also in figure 2, a ceramic washer 40 is shown between the head 29 of the fastener 27 and the protective element 26, which may be required depending on the nature of the outer layer 26b of the protective element 26.

If desired the invention may be employed to attach a metal protective element 26 to the insulating material of the lining, where such element is required to provide physical protection in furnaces where high velocity air impinges upon the furnace lining, which may carry sand or another hostile substance.

The protective layer 26 (or layers) could in another application comprise a simple blanket of textile material for dust suppression, or could comprise a high grade insulating material such as one of the aluminium based fibrous insulators. Thus a single protective element 26 may be provided for each module 12, or the protective element 26 or a layer of it, may span several modules 12, or more than one protective element 26 may be required for each module 12.

In another module 12 construction, instead of comprising folds, the modules 12 may be made up of cut sheets of fibrous material, or may even comprise a vacuum formed ceramic fibre block of material as desired.

The embedded member 25 need not comprise a plate as described but could be of other configurations, such as a long spike, with a female threaded opening provided thereby.

Referring to figures 6 and 6a there is shown an alternative member 25a which is adapted to be embedded in the insulating material of a furnace lining. The member 25a is similar to the member 25 shown in figure 4 but there are provided a pair of radiused edges 50,51, and the female threaded opening 31a thereof need not be sufficiently large to permit a tool such as tool 21 to pass therethrough.

The member 25a is adapted to be embedded in the insulating material 12 by being forced into the material and then rotated. The member 25a is generally

elongate having a longitudinal axis L. Preferably where the insulating material comprises a folded insulation blanket, the axis L of the member 25 is generally aligned with the folds to facilitate insertion into the material, and when rotated the member 25a extends transversely to the folds for maximum pull out resistance.

A tool 21a is used to insert and rotate the member 25a, the tool 21a having a pair of prongs 52 which are receivable in corresponding openings 53 provided in the member 25a. Thus, when the member 25a is embedded, the tool 21a may be removed, and the member will operate substantially as member 25 described above.

Referring to figures 7 and 7a, another embodiment 25b of member which is adapted to be embedded in the insulating material of the furnace lining is shown. The member 25b is, like member 25a described above with reference to figures 6 and 6a, adapted to be embedded in the insulating material by being forced therein and rotated. However, the member 25b of figure 7 has a shank 28b which in use extends towards the hot face of the furnace lining. This shank 28b is, in the example shown, attached to the remainder of the embedded member 25b, by means of co-operating screw threads, in this example the shank 28b having a male thread 55 engageable in a female threaded socket 56 of the member 25b, although in another arrangement, the shank 28b could comprise a female threaded part engageable with a male threaded part of the embedded member 25b.

Thus the shank 28b may be used to insert the member 25b and rotate the member 25b thus to embed the member 25b in the insulating material. In this example, the shank 28b projects from the hot face 20b of the lining and a protective element 26b, (which is shown for illustrative purposes in figure 7a as a ceramic bat but could comprise another protective element as described above) is positioned over the projecting shank 28b so that the shank 28b passes through an opening in the protective element 26b. A securing means comprising

a female threaded fastener 27b is received on the male threaded shank 28b to secure the protective element 26b to the hot face 20b.

In another arrangement such as indicated below with reference to figures 8 and 8a, the shank 28b could be integral with the remainder of the embedded member 25b, or a tool may be used embed the member 25b which is subsequently removed and the shank 28b then engaged with the embedded member 25b.

In yet another arrangement, the shank 28b attached to or integral with the remainder of the embedded member 25b, may be shorter than as shown in figure 7a and the securing means 27b may have a shank part which passes through the protective element 26b, and a head part to retain the protective element 26b between the head part and the hot face 20b. The shank part of the securing means 27b may co-operate with the shorter shank 28b attached to or integral with the embedded member 25b, for example they may have co-operating threads. In yet another arrangement, the embedded member 25b may have a simple opening or socket, with which a shank part of the securing means may co-operate, e.g. by both being provided with opposite screw threads.

Of course, an embedded member with an integral shank, or a socket, may be embedded in the material of the furnace lining during manufacture e.g. of the modules or blocks rather than being embedded by being forced into the insulating material and rotated.

Referring now to figures 8 and 8a yet another embodiment is illustrated. In this embodiment, a member adapted to be embedded in the insulating material 12 is shown at 25c, which member 25c has a shank 28c with, in this example, two plate-like transversely extending elongate parts indicated at P1 and P2. In this example the shank 28c and the two elongate parts P1, P2 are integrally provided but the two parts may be connected to the shank 28c as desired.

Each of the transversely extending plate-like parts P1, P2 has relatively sharp end edges 60, 61 which facilitate cutting through and separating the fibrous material of the insulating material 12 as the member 25c is rotated subsequent to having been thrust into the fibrous material with elongate axes L1, L2 of the elongate parts P1, P2 in alignment with the folds of the insulating material; 12, where provided.

To achieve the relatively sharp end edges 60, 61, preferably the elongate parts P1, P2 are tapered both axially along the respective parts P1, P2, and also across the widths of the parts P1, P2, as indicated by the edges 62, 64 indicated in figure 8a.

It will be appreciated that an embedded member like that shown in figures 8 and 8a may in an alternative arrangement have a single plate-like part P1 or P2 instead of the two shown.

As with the arrangements of figures 7 and 7a, the shank 25c of the embedded member of figures 8 and 8a has a male thread which is adapted to co-operate with a female threaded securing member (not shown).

In each of the embodiments described above, the protective element 26, 26a, 26b, 26c is described as being secured to the hot face 20 of the lining. In another embodiment, alternatively or additionally, a protective element 26 is secured at the cold face of the lining which is at or adjacent the furnace wall 11.

The cold face is indicated at C in the figures. The protective element 26 etc. is provided at the cold face C for the purpose of protecting the furnace wall 11 from the environment of the furnace, where there is a risk that the environment could damage the furnace wall 11.

Such protective element 26 etc. may be secured at the cold face C by a fastener means which cooperates with an embedded member 25, 25a, 25b, 25c in exactly the same manner as described above for the hot face 20.

During lining construction, the protective element 26 etc. may be inserted between the furnace wall 11 and the cold face C of the insulating material 12, but once the furnace lining is constructed, if it is desired to secure a protective element 26 etc. at the cold face C, either substantial dismantling of the lining construction would be required, or else part of the furnace wall 11 may be removed outwardly to permit the protective element 26 etc. to be positioned. Thus the application of the invention for securing a protective element at the cold face is more applicable during furnace lining construction whereas to secure the protective element or elements 26 to the hot face 20 of the lining may readily be achieved both during lining construction or subsequently.

The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

CLAIMS

1. A lining for a furnace the lining having insulating material attached to an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, characterised in that a protective element is provided at least partially to cover the hot and/or the cold face, the protective element being secured relative to the face by a securing means which co-operates with a member which is embedded in the insulating material.
2. A lining according to claim 1 wherein the securing means includes a headed fastener a shank of which co-operates with the embedded member.
3. A lining according to claim 2 wherein the shank of the headed fastener has provided thereon, a screw thread, and the embedded member includes a correspondingly opposite screw thread with which the shank is in use engaged.
4. A lining according to claim 3 wherein the shank of the headed fastener passes through a passage of the protective element into co-operation with the embedded member.
5. A lining according to any one of claims 2 to 4 wherein the protective element is provided at the hot face, and the headed fastener is made at least substantially of a ceramic material.
6. A lining according to any one of claims 1 to 3 wherein the embedded member includes an integral shank or is adapted to have a shank secured

thereto, and the securing means is engageable with the shank to secure the protective element to the hot face.

7. A lining according to claim 6 wherein one of the securing means and the shank passes through the protective element for securing to the shank or the securing means respectively.
8. A lining according to any one of the preceding claims wherein the protective element is of plate-like configuration.
9. A lining according to any one of the preceding claims wherein the protective element is made at least substantially of one or more of a ceramic material, a blanket of silica free insulation, a high-temperature resistant textile material, and a higher temperature resistant high alumina insulation that other insulation material of the lining.
10. A lining according to any one of the preceding claims wherein the furnace lining includes a plurality of individual blocks or modules of insulating material, each attached at the inside wall of the furnace, each module including a ceramic blanket which is folded to a block-like shape with the folds extending transversely to the furnace wall.
11. A lining according to claim 10 wherein the member which is embedded in the lining is embedded in at least one of the individual blocks so as to extend generally transversely to the folds.
12. A lining according to claim 11 wherein the embedded member is embedded in the lining by being forced into the lining material and then being rotated.

13. A lining according to claim 12 wherein the embedded member is generally elongate or has a generally elongate part or parts.

14. A lining according to claim 13 wherein the lining includes a ceramic blanket which is folded into a block-like shape, with the folds extending transversely to the furnace wall and the embedded member is forced into the insulating material with an elongate axis thereof or of the elongate part in an orientation generally aligned with the folds and is then rotated generally about an axis which is transverse to the elongate axis so that the elongate axis extends generally transverse to the folds.

15. A lining according to claim 13 or claim 14 wherein the embedded member is of a single plate or multiple plate-like construction and is made of a material which is sufficiently strong to resist pull-out forces.

16. A lining according to any one of the preceding claims wherein the protective element includes a plurality of layers which may or may not be bonded together.

17. A lining according to any one of the preceding claims wherein the protective element is secured relative to the hot or cold face of the lining by adhesive cement in addition to the securing means.

18. A lining for a furnace the lining including insulating material attached at an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, characterised in that a protective element is provided at least partially to cover the hot and/or the cold face, the protective element being secured relative

to the face by means including a headed fastener, a shank of which co-operates with a member which is embedded in the insulating material.

19. A lining for a furnace having insulating material attached at an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, characterised in that a protective element is provided at least partially to cover the hot and/or the cold face, the protective element being secured relative to the face by means including a member which is embedded in the insulating material and a securing means which is attached to a shank which is integral with the embedded member or is attached to the embedded member, the shank or the securing means passing through the protective element into engagement with the embedded member or the securing means.

20. A furnace lining substantially as hereinbefore described with reference to and as shown in the accompanying drawing.

21 A method of lining a furnace wall including the steps of attaching insulating material at or adjacent a wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, characterised in that the method includes embedding in the insulating material, a member which is adapted to co-operate with a securing means, providing a protective element at least partially to cover the hot and/or cold face, securing the protective element to the face by attaching the securing means to the embedded member

22. A method according to claim 21 wherein the securing means includes a headed fastener, the method including inserting a shank of the headed fastener

through the protective element into the insulating material so that the shank may co-operate with the embedded member.

23. A method according to claim 22 wherein the shank of the headed fastener co-operates with the embedded member by rotating the shank relative to the embedded member so that a screw thread of the shank engages with a corresponding screw thread of the embedded member.

24. A method according to any one of claims 21 to 23 which includes inserting the shank of the fastener through an opening preformed in the insulating material, and into co-operation with the embedded member.

25. A method according to claim 21 which includes attaching a shank to the embedded member, and engaging the securing means and the shank to secure the protective element to the hot and/or the cold face.

26. A method according to claim 21 wherein the embedded member is embedded in the insulating material by forcing the member into the insulating material and then rotating the member so that the member may cut or divide the insulating material and be anchored therein.

27. A method according to any one of claims 21 to 26 wherein the furnace is modular having a plurality of modules or blocks of insulating material, and the method being characterised in that a substantial part of the furnace wall is covered by a plurality of protective elements each secured at the hot and/or the cold face of the insulating material to at least one individual module, by means including a securing means which co-operates with a member which is embedded in the insulating material.

28. A method according to claim 27 where dependent on claim 26 wherein the method includes inserting the member to be embedded when in an orientation generally aligned with the folds and then rotating the member so that the member extends transversely to the folds.

29. A method according to claim 26 or claim 28 wherein the member to be embedded includes a shank and the member is rotated by using the shank as a tool.

30. A method according to claim 26 or claim 28 wherein the member is rotated using a tool which co-operates with the member and is subsequently removed from the insulating material.

31. A method of lining a furnace wall including the steps of attaching insulating material at or adjacent the wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the face wall, characterised in that the method includes embedding in the insulating material, a member which is adapted to co-operate with a shank of a headed fastener, providing a protective element at least partially to cover the hot or the cold face, securing the protective element to the face by inserting the shank of the headed fastener through the protective element into the insulating material, so that the shank may co-operate with the embedded member.

32. A method of lining a furnace wall including the steps of attaching insulating material at or adjacent the wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent the furnace wall, characterised in that the method includes embedding in the insulating material, a member which is adapted to co-operate

with a securing means, providing a protective element at least partially to cover the hot or cold face, securing the protective element to the face by attaching the securing means to the embedded member such that the protective element is retained between the securing means or a part thereof, and the face.


33. A method of repairing a lining of a furnace made by the method of any one of claims 26 to 32 including the steps of removing the securing means, removing the protective element or a layer of the protective element, and securing a replacement protective element or protective element layer, to the face of the insulating material by a securing means which co-operates with a member which is embedded in the insulating material.

34. A method of repairing a lining of a furnace substantially as hereinbefore described with reference to the accompanying drawings.


35. A method of improving the thermal resistance of an existing furnace lining having insulating material attached to an inside wall of the furnace, the insulating material in use having a hot face which faces inwardly of the furnace and a cold face at or adjacent a furnace wall and the lining having a member which is adapted to co-operate with a securing means the method including providing a protective element at least partially to cover the hot or cold face, the protective element being secured relative to the hot face by the securing means co-operating with the member which is embedded in the insulating material.

36. A method of improving the thermal resistance of a furnace lining substantially as hereinbefore described with reference to the accompanying drawings.

37. Any novel feature of novel combination of features disclosed herein and/or as shown in the accompanying drawings.

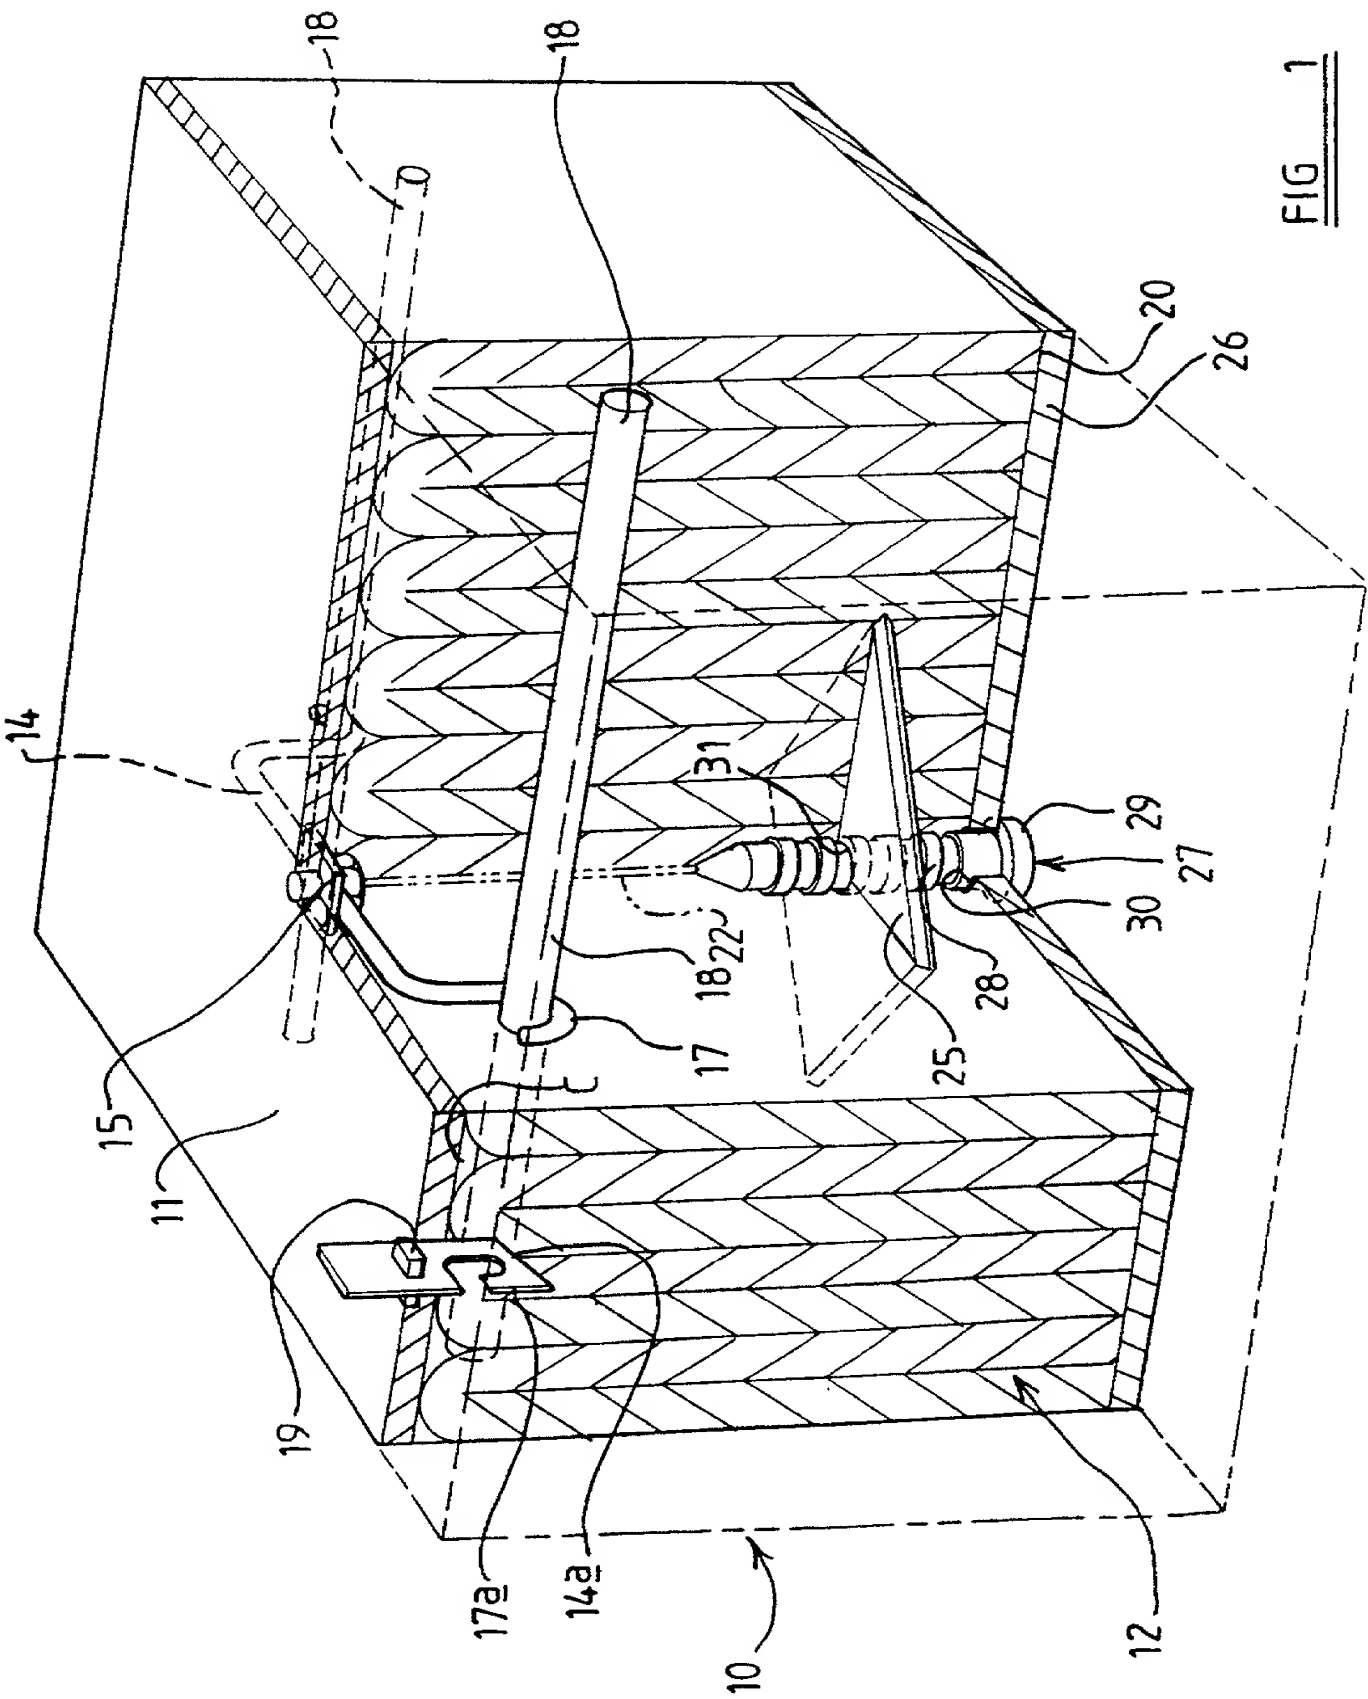

2 / 6

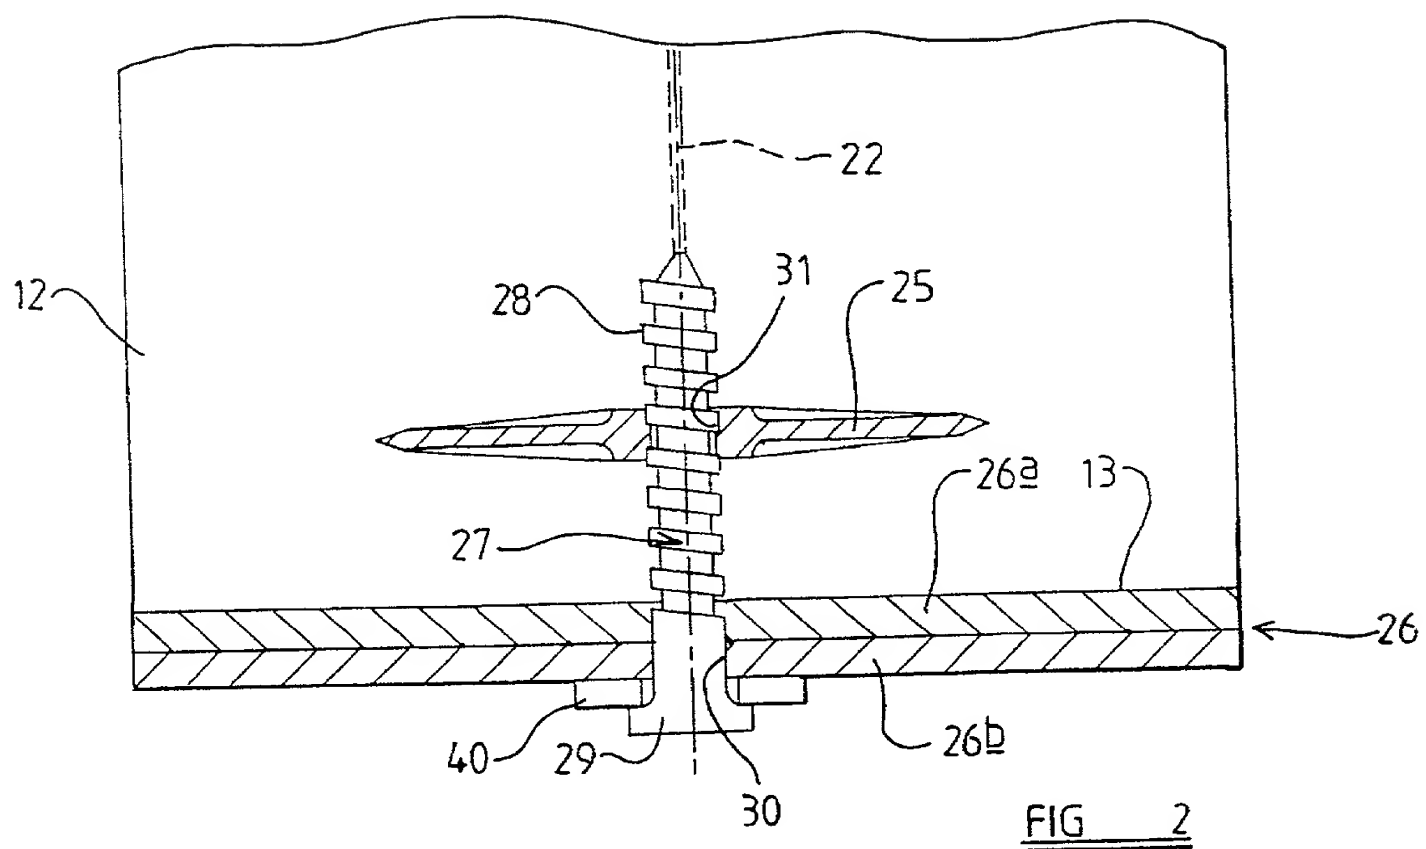

3 / 6



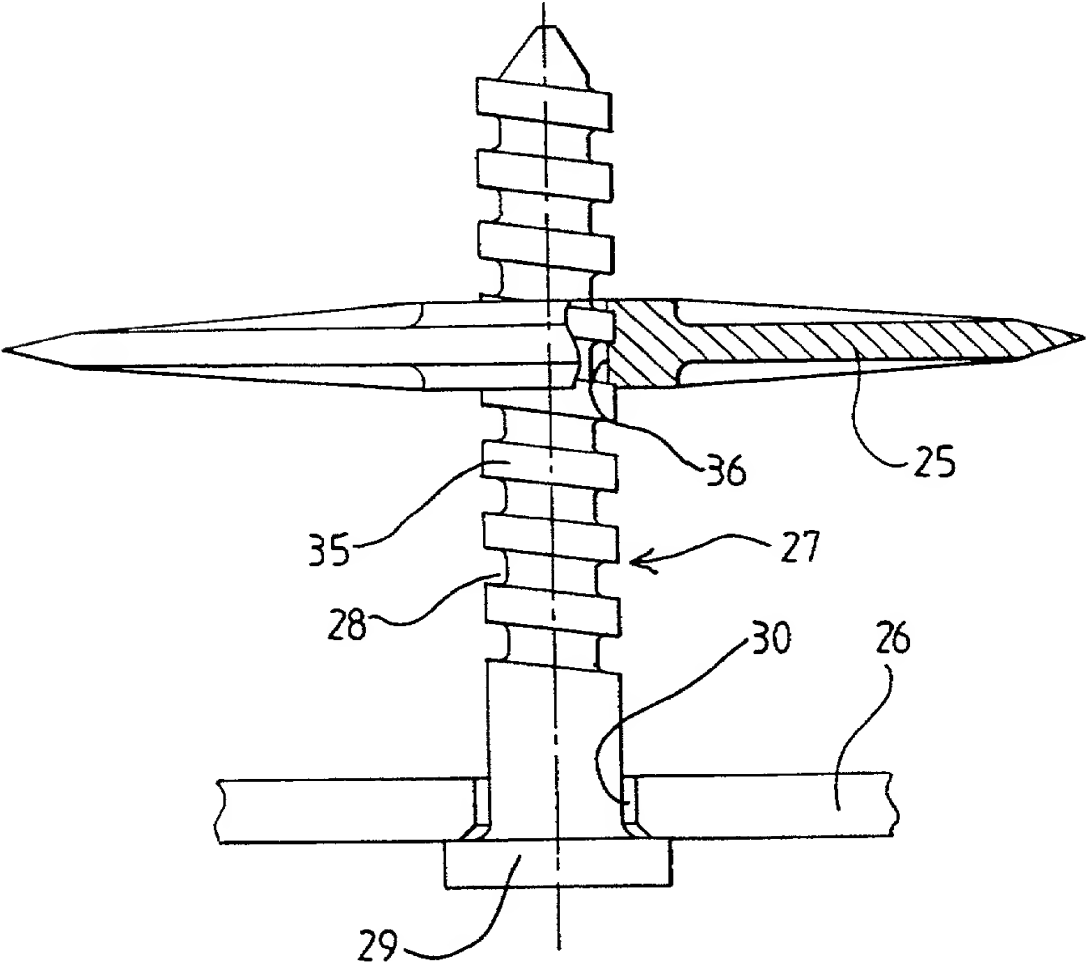


FIG 3

4 / 6

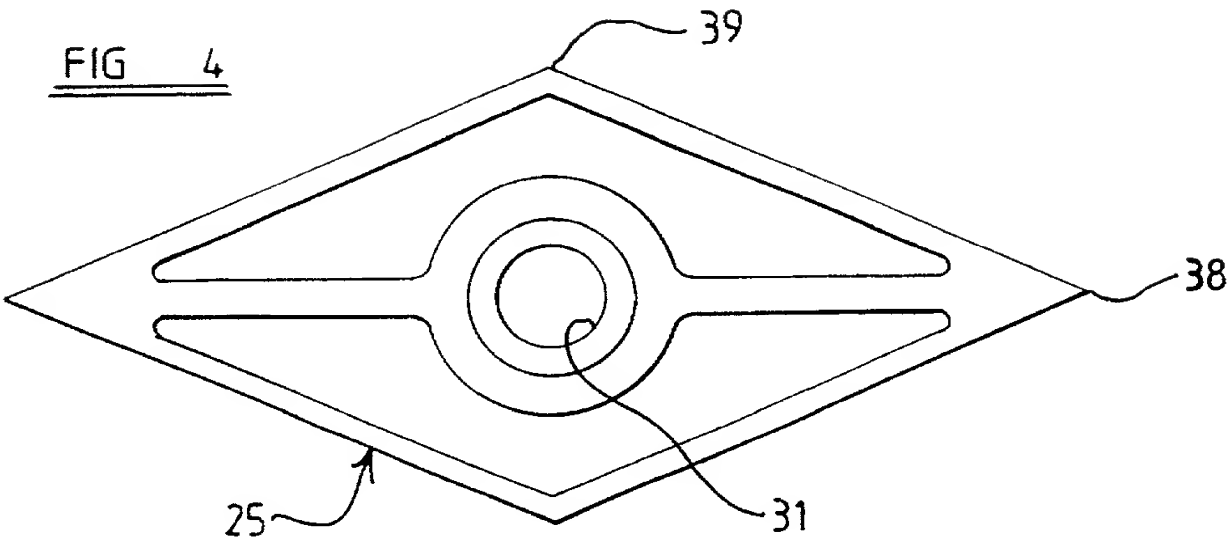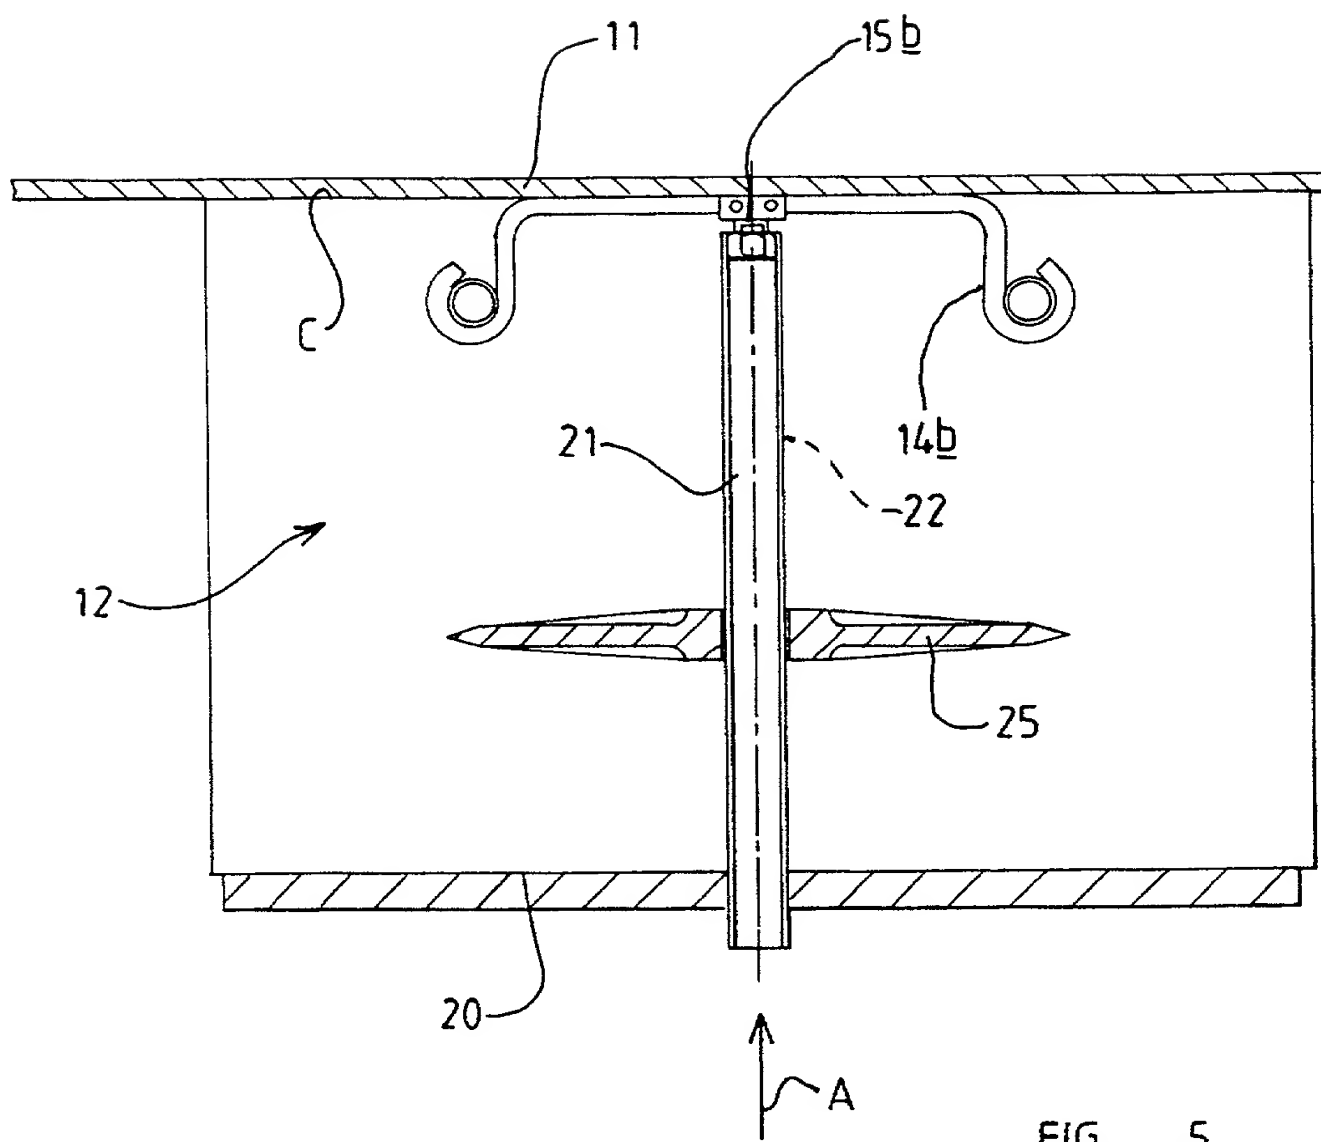

5 / 6

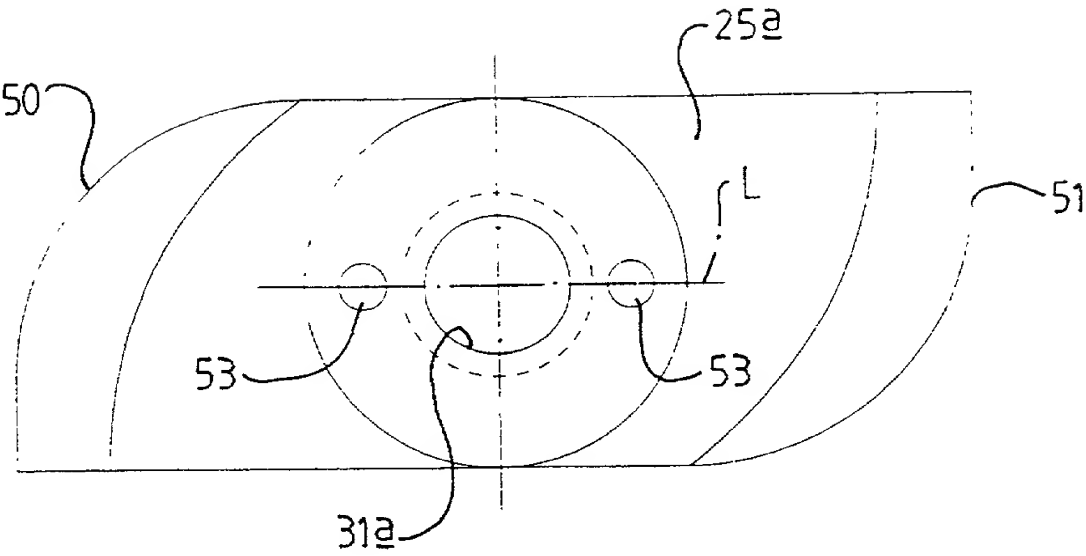


FIG 6

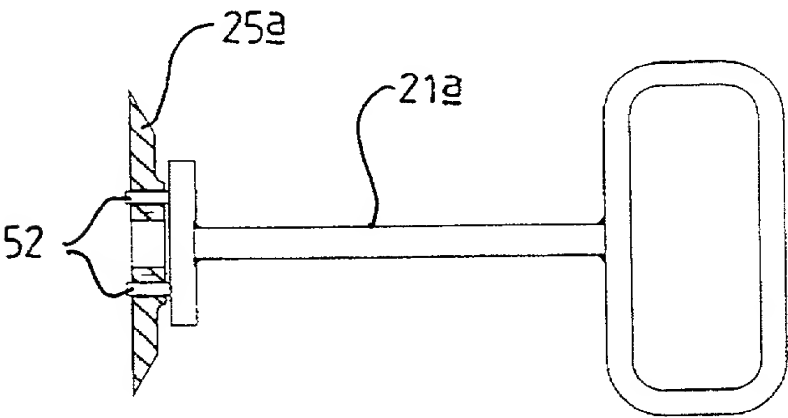


FIG 6a

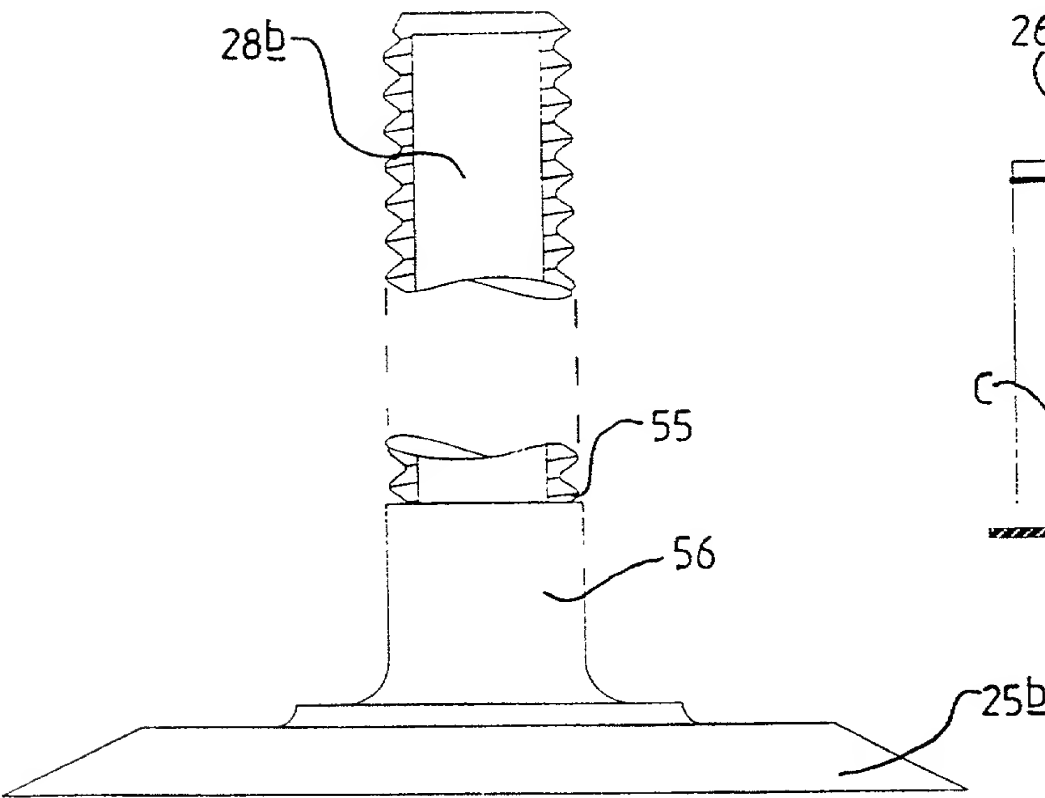


FIG 7



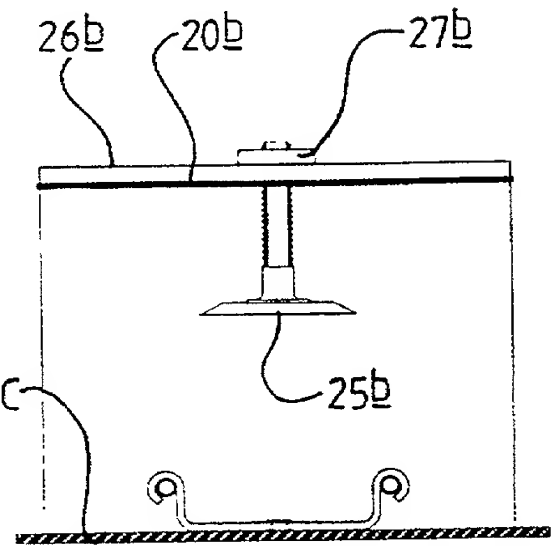


FIG 7a

6 / 6

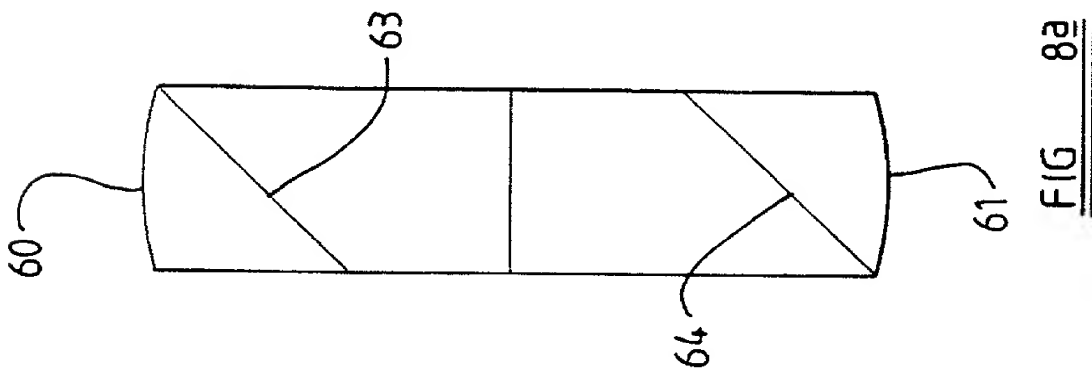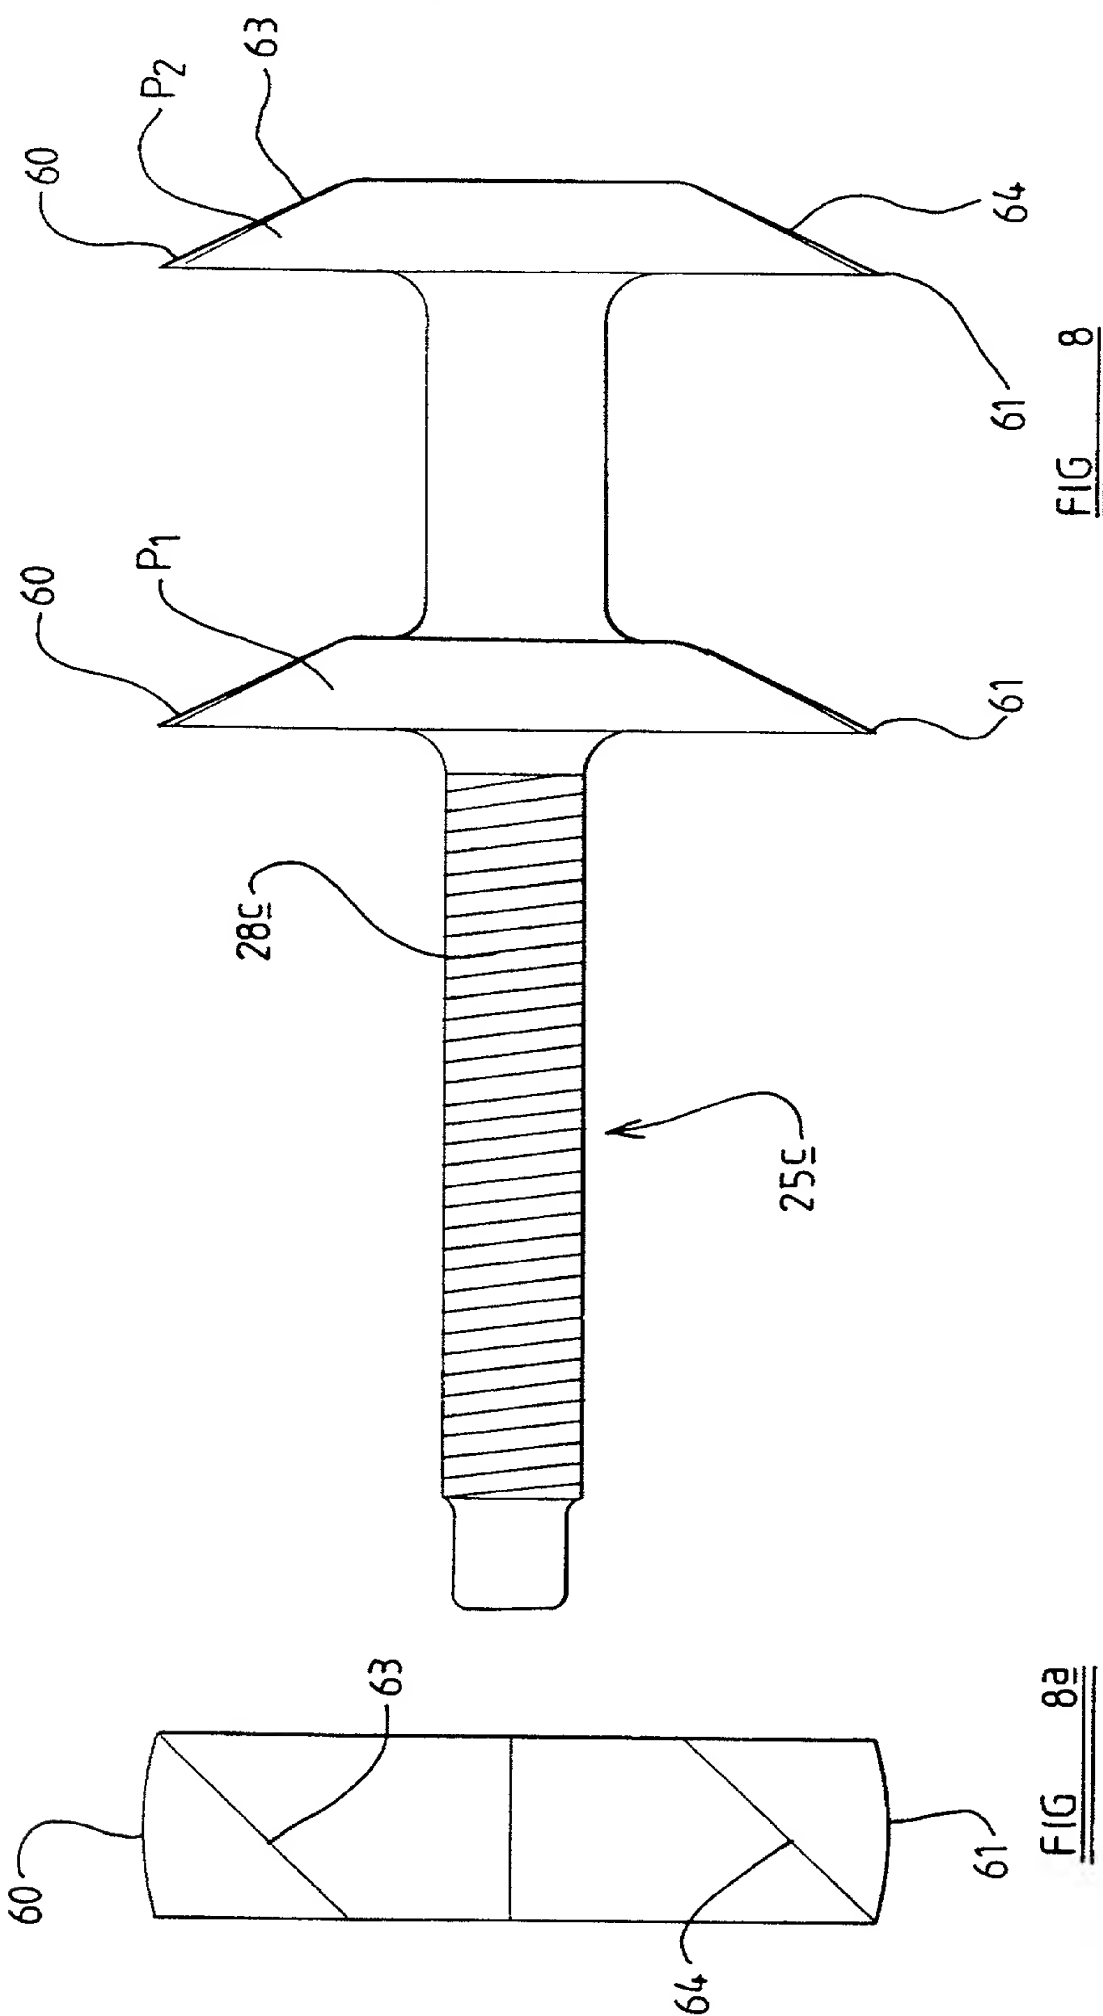

Attorney Docket No. 1-22918**COMBINED DECLARATION AND POWER OF
ATTORNEY IN ORIGINAL APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name,

I believe that I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Furnace Lining

the specification of which:

_____ is attached hereto.

_____ was filed on _____ as application Serial No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent And Trademark Office information known by me to be material to the patentability of this invention as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Serial No 9816091.4 Country: GB Filed: 7/24/98 Priority: X Yes No
Serial No. 9819294.1 Country: GB Filed: 9/07/98 Priority: X Yes No

Serial No. 9820786.3 Country: GB Filed: 9/25/98 Priority: X Yes No

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional applications(s) listed below:

Application No. _____ Filing Date: _____

Application No. _____ Filing Date: _____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose to the

United States Patent And Trademark Office information known by me to be material to the patentability of this invention as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Serial No. WO 01/05543 Filed: 17 May 1999 Status: Pending
(patented, pending, abandoned)

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the United States Patent And Trademark Office connected therewith with full power of substitution and revocation: Donald R. Fraser, Reg. No. 17,919; Oliver E. Todd, Jr., Reg. No. 24,746; William J. Clemens, Reg. No. 26,855; Ted C. Gillespie, Reg. No. 27,981; Mark J. Sobanski, Reg. No. 29,700; Richard S. MacMillan, Reg. No. 30,085; Garm M. Sutter, Reg. No. 31,574; John B. Molnar, Reg. No. 31,914; A. Michael Tucker, Reg. No. 32,539; Marc J. Luddy, Reg. No. 33,061; Larry R. Meenan, Reg. No. 33,423; Douglas V. Pavelko, Reg. No. 36,888; Allen W. Inks, Reg. No. 37,358; Thedford I. Hitaffer, Reg. No. 38,490; Peter J. Rashid, Reg. No. 39,464; and Scott A. Blake, Reg. No. 40,515. Direct all telephone calls to Oliver E. Todd, Jr. at telephone number (419) 255-5900. Address all correspondence to MacMILLAN, SOBANSKI & TODD, LLC, One Maritime Plaza, 4th Floor, 720 Water Street, Toledo, Ohio 43604, facsimile No. (419) 255-9639.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Thomas Gildroy Dixon

Inventor's Signature Thomas Gildroy Dixon Date 15/01/01

Post Office Address: 41 Whitford Road, Aston Fields, Bromsgrove, Worcestershire, B61 7ED,

Citizenship: BRITISH Residence: U.K. United Kingdom

Full name of second joint inventor, if any: _____

Inventor's Signature _____ Date _____

Post Office Address: _____

Citizenship: _____ Residence: _____